



TM12232E-1


深圳市天广宽科技有限公司

Tel: 0755-83685744 23007596 Fax: 0755-23007597

<http://www.tgkcd.com> E-mail: sg2966@163.com

销售公司地址: 深圳市福田区华强北路赛格广场二楼2834号

① PHYSICAL DIMENSION/外型尺寸

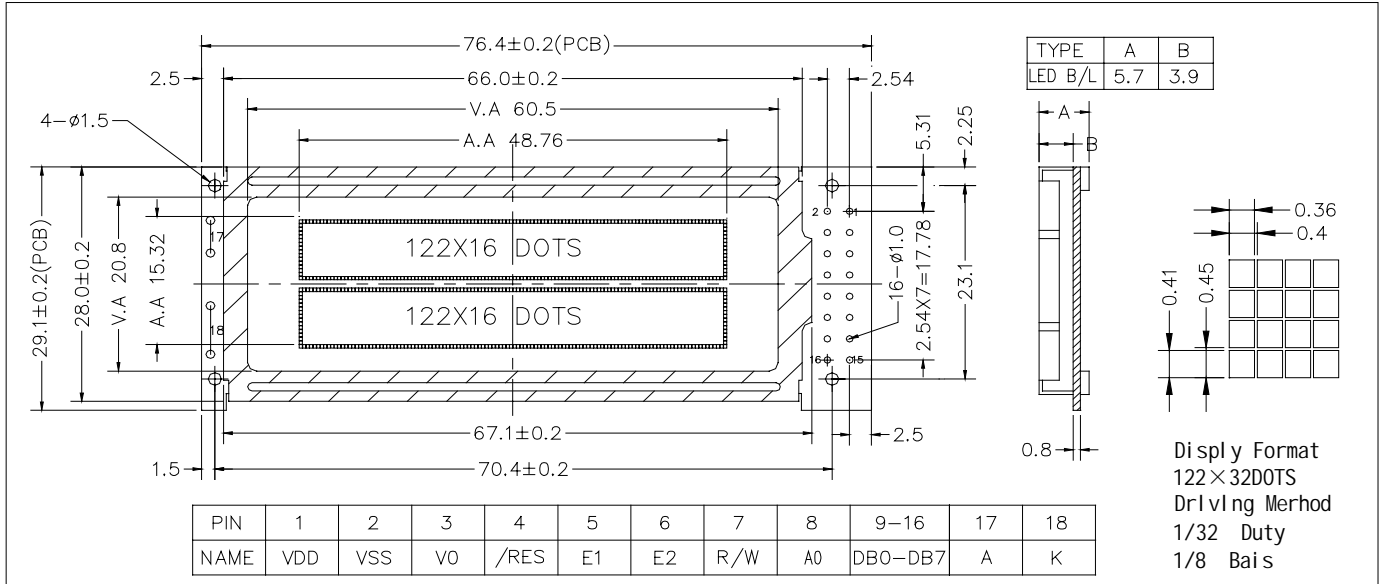


② FEATURES/特征

Feature(特征)	UNIT(单位)
LCD type & Colour(类型及颜色)	STN Yellow-green ; STN Blue
View Angle(视角)	60° clock
Operating temperature(工作温度)	-20°C ---- +70°C
Storage Temperature(贮存温度)	-30°C ---- +80°C
Control IC & Package(控制芯片及封装)	SED1520 , COB
Weight(重量)	21 (With B/L) g
Backlight(背光类型)	LED

Ta=25°C	MIN(最小)	TYP(典型)	MAX(最大)	UNIT(单位)
Supply current don't contain backlight(无背光时电流)	0	8		mA
VDD(电源)	-0.3	5.0	5.5	V
VLCD-V0(LCD驱动电压)	0	4.7	5.3	V
Backlight LED (背光电压, 电流)	侧白光	0	5.0	V
	底白光	0	70	mA
		0		V
		0		mA

④ BLOCK DIAGRAM/原理电路

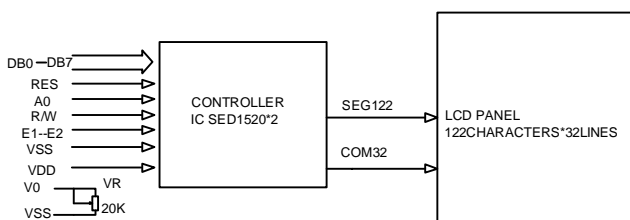

③ PIN CONFIGURATION/管脚说明

ITEM	SYMBOL	DESCRIPTION
1	VDD	Power positive(逻辑电压) +5.0V
2	VSS	Power ground(地)
3	V0	Operating voltage for LCD Driver(对比度调节)
4	RES	Reset Signal(复位)
5	E1	Enable trigger.(使能信号1)
6	E2	Enable trigger.(使能信号2)
7	R/W	Read or Write.(写数据)
8	A0	H:Data L: Instruction Code(指令 数据信号)
9	DB0	Data bus [0-7]. These state I/O common terminal.(数据线0-7)
16	DB7	
17	BLA	Power supply for backlight(+)(背光正极)+5.0V
18	BLK	Power supply for backlight(-)(背光负极)

⑤ ELUCIDATION/补充备注

1. Manifestation cent cent hold manifestation with whole hold manifestation Two kinds.

显示分全屏显示和分屏显示两种