



# TM24064B-1


深圳市天广宽科技有限公司

Tel: 0755-83685744 23007596 Fax: 0755-23007597

<http://www.teklcd.com> E-mail: sg2966@163.com

销售公司地址: 深圳市福田区华强北路赛格广场二楼2834号

## ① PHYSICAL DIMENSION/外型尺寸

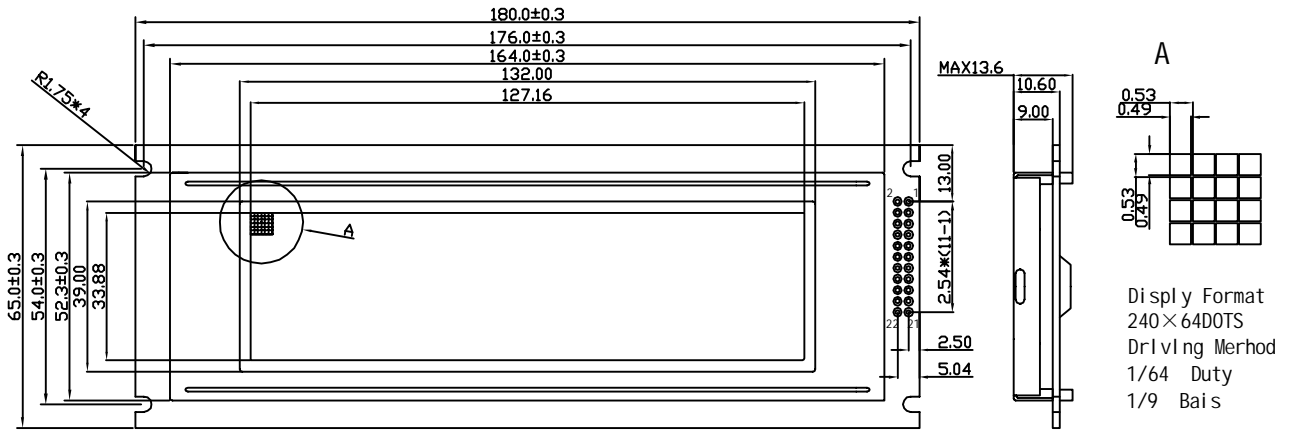


## ② FEATURES/特征

Feature(特征)	UNIT(单位)
LCD type & Colour(类型及颜色)	STN Yellow-green ; STN Blue ; FSTN
View Angle(视角)	60° clock
Operating temperature(工作温度)	-20°C ---- +70°C
Storage Temperature(贮存温度)	-30°C ---- +80°C
Control IC & Package(控制芯片及封装)	T6963C , SMT
Weight(重量)	153 (With B/L) g
Backlight(背光类型)	LED

Ta=25°C	MIN(最小)	TYP(典型)	MAX(最大)	UNIT(单位)	
Supply current don't contain backlight(无背光时电流)	0	12.0		mA	
VDD(电源)	-0.3	3.3	5.0	5.5 V	
VLCD-V0(LCD驱动电压)	0	-6.8		V	
Backlight LED (背光电压, 电流)	侧背光	0	3.3	5.0	5.0 V
	底背光	0	120	120	mA
		0	3.3	5.0	5.0 V
		0	180	180	mA

## ④ BLOCK DIAGRAM/原理电路

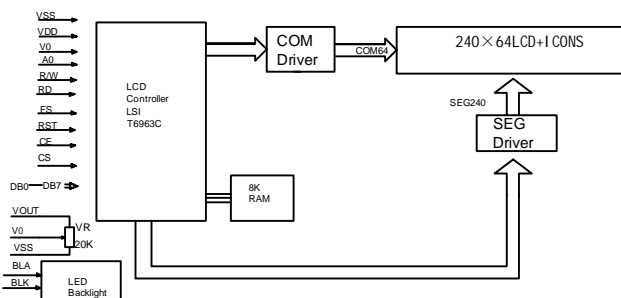

## ③ PIN CONFIGURATION/管脚说明

PIN	SYMBOL	DESCRIPTION(定义描述)
1	FG	Frame Grokund(铁框地)
2	VSS	Power ground(地)
3	VDD	Power positive(逻辑电压)+5.0V
4	V0	Operating voltage for LCD Driver(对比度调节)
5	R/W	Read or Write.(写数据)
6	RD	Register select(读信号)
7	CE	Chip select(片使能信号)
8	C/D	L: Data H: Instruction Code(指令 数据信号)
9	NC	No connection(空脚)
10	RST	Reset Signal(复位)
11	DB0	Data bus [0-7]. There state I/O common terminal.(数据线0-7)
18	DB7	
19	FS	Font Select(字体选择)
20	VOUT	Negative voltage output(负压输出)
21	BLA	Power supply for backligh(+)(背光正极)+5.0V
22	BLK	Power supply for backligh(-)(背光负极)

## ⑤ ELUCIDATION/补充备注